


# Lithium Manganese Dioxide Battery

# CR1616

## ■ Dimensions(mm)

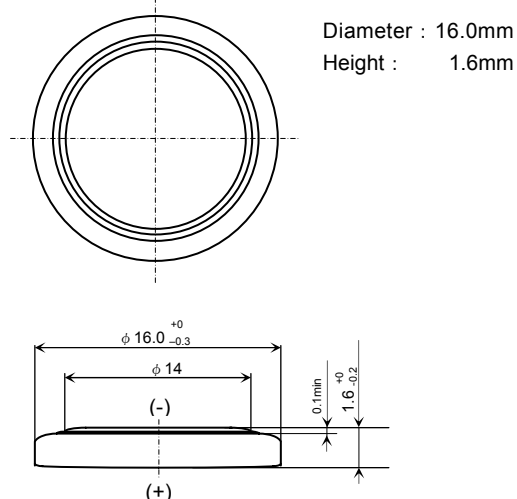


## ■ Specifications

Nominal Voltage	3V
Nominal Capacity ( 2.0V cutoff)	60mAh
Standard Discharge Current	0.1mA
Weight	1.1g


### Applications

- Electronic Watch or Clock
- Electronic Calculator
- Memory Back-up Power Source for SRAM or Real Time Clock (RTC)


## ■ Discharge Characteristics

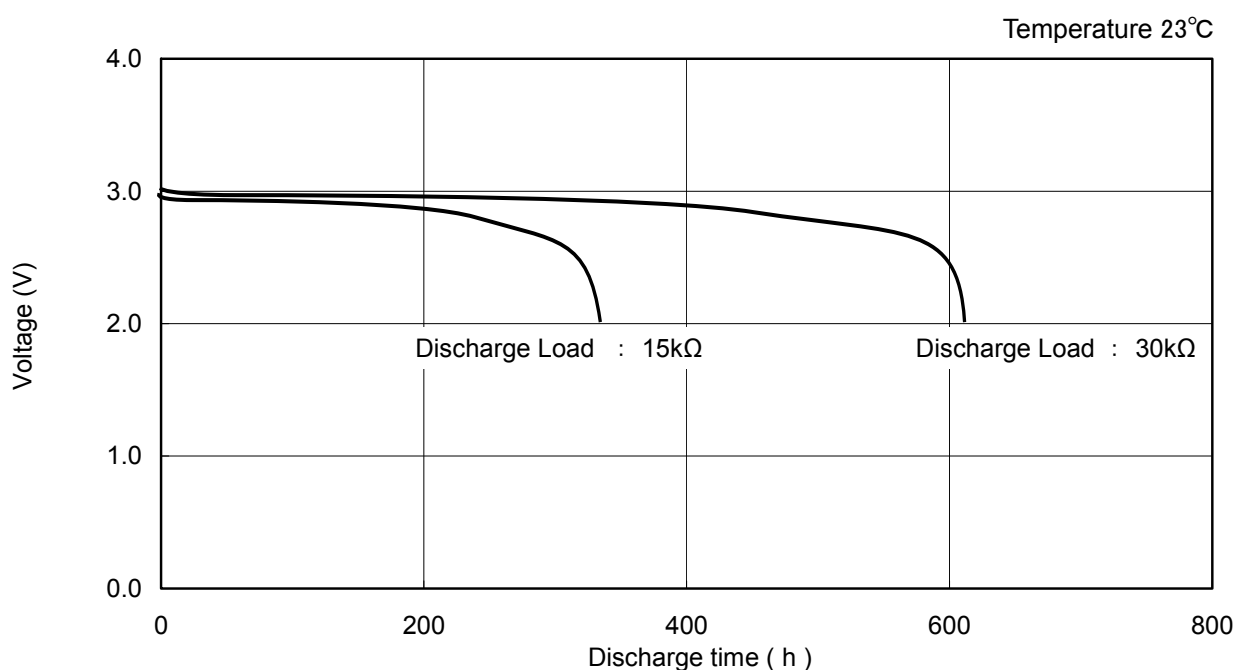


## ■ Discharge Characteristics on Load

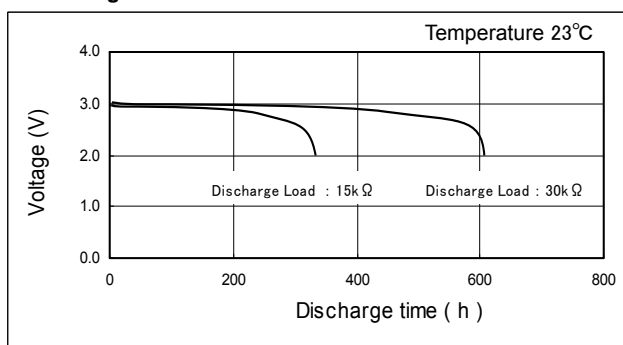


## ■ Discharge Characteristics on Temperature

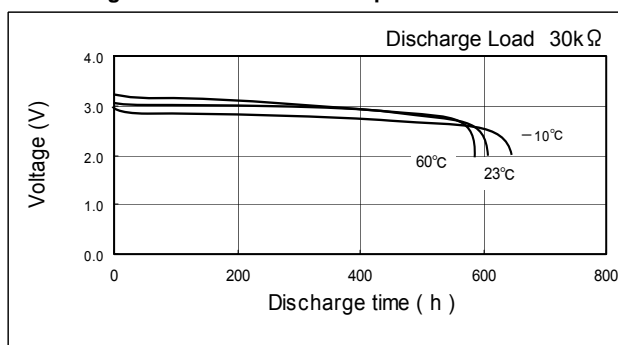


## ■ Discharge Load vs. Operation Voltage (Discharge depth 40%)

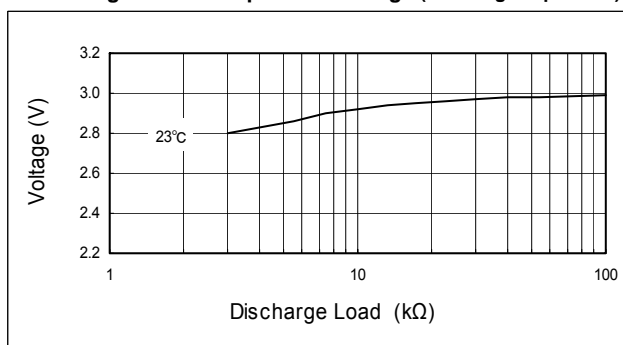


## ■ Discharge Load vs. Discharge Capacity

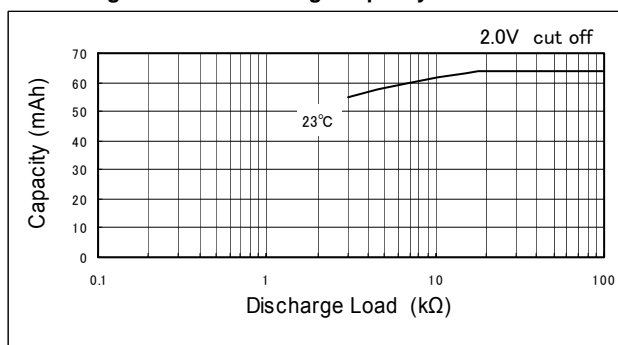

## ■ Discharge Characteristics on Pulse Load (Discharge depth 40%)

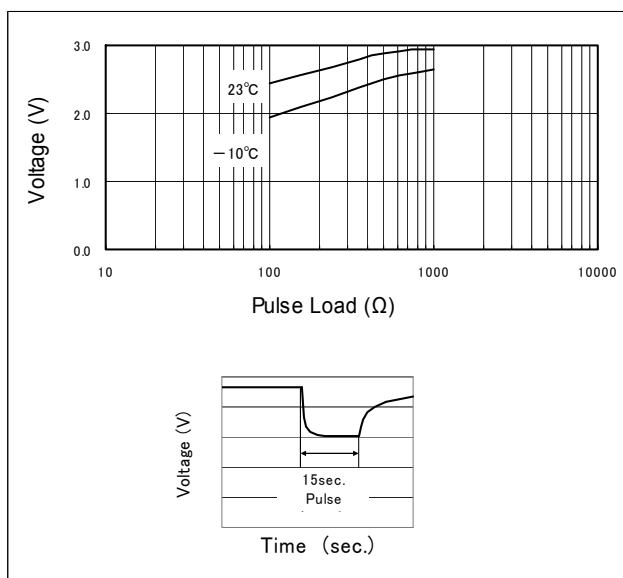

## ■ Storage Characteristics

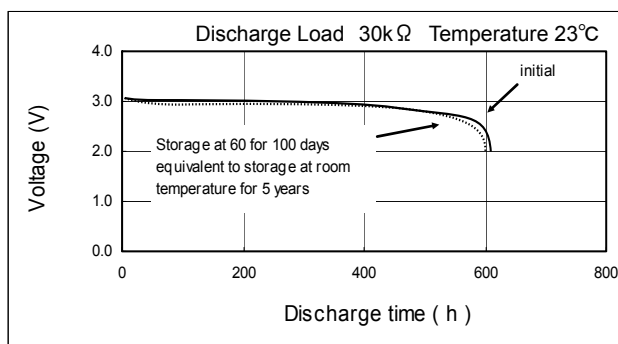

\* These values are not guarantee.